

IDEAL SOLUTION FOR PORTABLE PRINTING

# MOBILE PRINTER

## LK-P22

- Durability emphasized structural design
- The highest printing speed in its class (100mm/s)
- Enhanced user convenience with 5-point indicator
- Supports the latest Bluetooth 4.2 technology
- Large roll capacity(Ø40mm)
- Long battery life (1450mA)
- The size is smaller than cellphones
- Easy Bluetooth connection setting by using NFC function!




Made for  
 iPhone  iPad



### NFC

**No more complicated Bluetooth connection setting!**  
 Easy Bluetooth connection setting by using NFC function!  
 Equipped NFC capability for easier printer setting

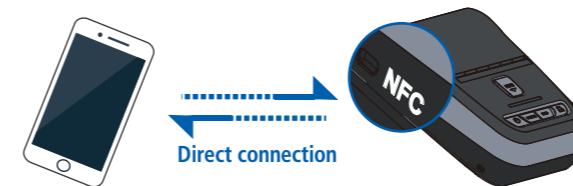

### CRADLE

4 CRADLES IN 1 SET



1 power supply can be charged up to 4 cradles in a set

## SPECIFICATION

| ITEM                     | TYPE  |   |
|--------------------------|---|---|
| MODEL                    | LK-P22  |   |
| PRINTING                 | METHOD  | Direct Thermal  |
|                          | SPEED   | 100mm / sec   |
| DOT DENSITY              | 203 DPI   |   |
| DOT PITCH                | 8dots /mm, 0.125 pitch  |   |
| EFFECTIVE PRINTING WIDTH | 48mm, 384dots/line  |   |
| CHARACTER PER LINE       | Font A(12 x 24) 32 columns<br>Font B(9 x 17) 42 columns   |   |
| PAPER                    | TYPE  | Thermal Paper   |
|                          | WIDTH   | Max. 58mm   |
|                          | THICKNESS   | 0.06mm  |
|                          | ROLL DIAMETER   | Max. ø 40mm   |
|                          | ROLL CORE INNER   | 12.5mm ± 0.5mm  |
| RELIABILITY              | TPH LIFE  | 50km  |
|                          | PULSE ACTIVATION  | 50,000,000 pulse or more(12.5% Print Ratio)   |
| CHARACTER SET            | ALPHA NUMERIC CHARACTER   | 95  |
|                          | EXTENDED GRAPHIC INTERNATIONAL CHARACTER  | 14  |
|                          | BARCODE   | 1D  |
| BARCODE                  | 2D  | QR, PDF417, MicroPDF417, Maxicode, Datamatrix, Aztec, RSS14, TLC39  |
|                          | CHARACTER SET   | FontA(12x24), FontB(9x17), Asian Font(KOR,JPN, CHN_GB2312,CHN_BIG5), Font0/1/2/4/5/6/7, Resident TTF, Downloadable TTF, FontA~H, FontGS, Resident TTF(Font0), Font1 ~ 8 |
| EMULATION                | ESC/POS, CPCL, ZPL Command compatible   |   |
| DRIVER                   | Windows Driver(10, 2012, 8, 7, 2008, VISTA, 2003, XP, 32bit & 64bit), Window CE & Mobile Driver & SDK(CE 4.2~, Mobile 5.0~), Linux Driver, Mac Driver, OPOS Driver, JavaPOS Driver, iOS SDK, Android(2.1~) SDK, Blackberry SDK, Symbian |   |
| SENSOR                   | Paper End, Cover Open, Black Mark   |   |
| INTERFACE                | STANDARD  | USB   |
|                          | OPTION  | Bluetooth Smart Ready Ver 4.2 or Wi-Fi (802.11 a/b/g/n)   |
| BATTERY CHARGER          | AC/DC Charger   |   |
| BATTERY                  | 7.4V 1450mAh Li-ion,<br>1.7Hrs Charging time,<br>36Hrs Stand-by   |   |
| DIMENSION                | 80mm x 119.4mm x 44mm ( W x D x H )   |   |
| WEIGHT                   | 242.5g (With Battery)   |   |
| TEMPERATURE              | OPERATION   | -10 ~ 50°C  |
|                          | STORAGE   | -20 ~ 60°C  |
| HUMIDITY                 | OPERATION   | 35 ~ 80%  |
|                          | STORAGE   | 10 ~ 90%  |

• All specification and desings are subject to change without notice.

